



YOUTHFUL

BILGE BLOWER, BATTERY SWITCH, FAN

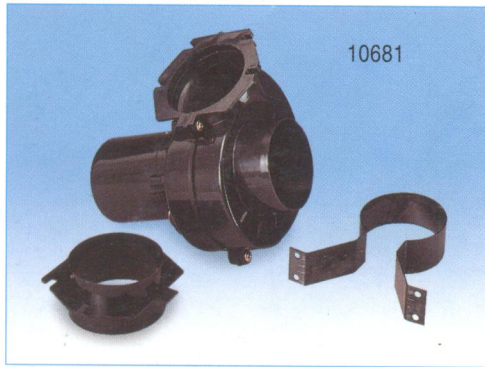

BILGE BLOWER WITH BRACKET

- 10681** Spark proof
DC 12V/3A, 24V/1.5A
Air 2500 liters per minute (90 CFM)
76mm (3") Intake pipe




BILGE BLOWER

- 10680** Spark proof
DC 12V/3A, 24V/1.5A
Air 2500 liters per minute (90 CFM)
76mm (3") Intake pipe




IN-LINE BILGE BLOWER

- High impact ABS housing
DC 12V/4.5A, 24V/2.5A
Air 122 CFM
10690 76mm (3") Intake pipe
10691 102mm (4") ventilator hose

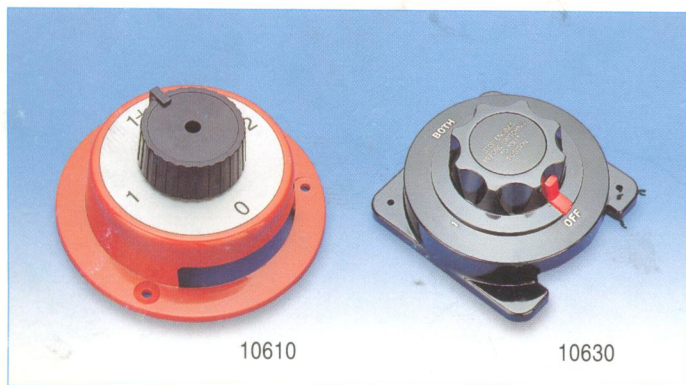

BATTERY SWITCH

- 10610** Rated at 230A continuous duty at 12V, intermittent 300A
Use w/6V-32V systems
5-1/2" Dia. ABS housing w/brass terminals & copper washers
- 10630** Rated at 230A continuous duty at 12V, intermittent 300A
Use w/6V-32V systems
5-1/2" Dia. bakelite housing w/brass terminals & copper washers

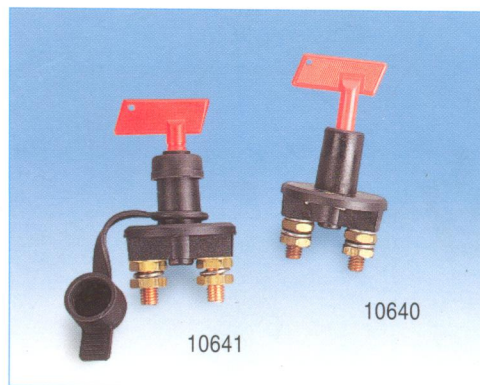


BATTERY SWITCH

- 10640** Nylon fiberglass with two plugs max. 500 AMP
10641 Nylon fiberglass with two plugs max. 500 AMP
"with rubber cap"



OSCILLATING FAN

- 10431** DC 12V, 24V
Blade: 6" Acrylonitrile styrene
Guard: PVC coated, 30 grills,
single guard

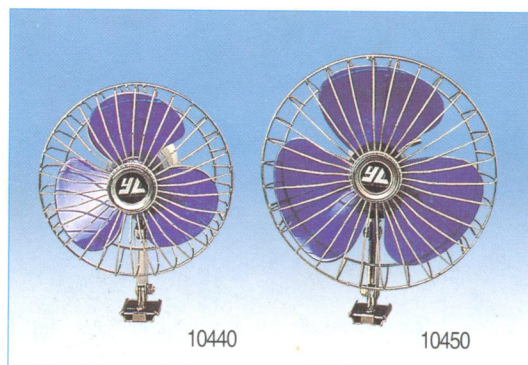

OSCILLATING FAN

- 10440** DC 12V, 24V
Blade: 6" Acrylonitrile styrene
Guard: Steel chrome plated, 30 grills,
single guard

OSCILLATING FAN

- 10450** DC 12V, 24V
Blade: 8" Acrylonitrile styrene
Guard: Steel chrome plated, 30 grills,
single guard

1.4 Amp